

En application de la directive n°89/686/CEE du 21 décembre 1989 concernant le rapprochement des législations des Etats Membres relatives aux équipements de protection individuelle l'échantillon essayé est déclaré conforme aux exigences essentielles de santé et de sécurité du décret n°2007-1133 du 24 juillet 2007 portant transposition de cette directive en droit français,

*In application of the directive n°89/686/EEC dated 21/12/89 on the approximation of the laws of the Member States relating to personal protective equipment and the decree n°2007-1133 of July 24<sup>th</sup> 2007 transposing this Directive into French law,*

Le **C.R.I.T.T. SPORT-LOISIRS**, habilité par le ministère de l'économie, de l'industrie et de l'emploi, pour effectuer l'examen CE de type prévu par l'article R.322-35 du code du sport et identifié sous le numéro **0501** (publié au JORF du 23/06/2015) attribue  
*The C.R.I.T.T. SPORT-LOISIRS, authorized by order of the Ministry in charge of economy, industry and labour, for the EC type examination with the number 0501 (notified in JORF on June 23, 2015) grants*

## L'ATTESTATION D'EXAMEN CE DE TYPE *the EC type Examination Certificate* **N° 0501/2580/162/12/16/1872**

au modèle d'équipement de protection individuelle suivant :  
*to the following designated personal protective equipment:*

- Protection pour Sellette de parapente *Protection for Paraglider harness*.....(dénomination)(*product*)
- **Evasion 2** .....(marque commerciale)(*trademark*)
- Unique *one size*.....(taille)(*size*)
- **SUPAIR**, 34 rue Adrastée 74650 CHAVANOD- FRANCE..(fabricant et demandeur)(*manufacturer and applicant*)
- Protocole *Protocol* **CRITT SL SP-001 02/2016**.....(référentiel technique)(*standard*)



12-16-1872  
16-2815  
EVASION 2

Fait à Châtelleraut, le 24/07/2017  
*Châtelleraut, the 07/24/2017*



**Franck LEPLANQUAIS**  
Directeur (*Manager*)

Nota : toute modification apportée au matériel neuf objet de la présente attestation d'examen CE de type doit être portée à la connaissance de l'organisme habilité, en application de l'article R 322-35 du Code du sport. *Any modification carried out on the material being the subject of the present EC type Examination Certificate must be brought to the authorised body in application of Article R 322-35 of the sport Code.*

Cette attestation comporte 1 page. *This is a one page document.*

**CRITT Sport Loisirs de Poitou-Charentes**

ZA du Sanital – 21 Rue Albert Einstein - 86100 CHATELLERAULT - France

☎ : 33 (0)5 49 85 38 30 ☒ : 33 (0)5 49 21 76 20 Courriel : [franck.leplanquais@critt-sl.com](mailto:franck.leplanquais@critt-sl.com) Site Internet : <http://www.critt-sl.com>



## Test Report

This test report describes the test results of the below mentioned paragliding harness.

All the tests were carried out by:

Air Turquoise SA, official test laboratory of Switzerland.

para-test.com



paragliding by air turquoise

## Standards

Tests were carried out in conformity with the following standards:

- 2. DV LuftGerPV §1, Nr. 7 c (\*note: in what follows this will be abbreviated by "LTF")
- European Standard EN1651 September 1999 (\*note in what follows this will be abbreviated by "EN")
- European Standard EN12491 September 2001 (\*note in what follows this will be abbreviated by "EN12491")

## Harness details

<b>Manufacturer:</b>	SUPAIR - VLD
<b>Harness model:</b>	Evasion 2
<b>Size:</b>	Medium
<b>Harness Weight:</b>	3.3 kg
<b>Maximum certified pilot weight:</b>	120 kg
<b>Impact protection type:</b>	Air Bag
<b>Harness type:</b>	ABS
<b>Test responsible:</b>	Alain Zoller
<b>Test place:</b>	Villeneuve
<b>Test date:</b>	December 01, 2014
<b>Test room temp &amp; humidity:</b>	21,5° C; 45%rel
<b>Certification number EN:</b>	PH 116.2014
<b>Certification number LTF:</b>	GZ 116.2014

page 1 of 4

Air Turquoise SA certified by



**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3



## Test summary

### A. STRUCTURAL STRENGTH TESTS

A test plan was set up in order to execute the different tests in an efficient order. The table below summarizes this test plan together with the applicable standards and results.

Test ID	TESTED ?	Standard Ref.		TEST setup	Anchoring		Forces		Min. Test duration [sec]	Result
		EN	LTF		Attach - ment points	Dummy	Req. Load in g	Min. force [N]		
1	✓	5.3.2.1	4.2.1.a	Default flying position	2 main attachment points	Hip fixated	6g	6000	10	OK
2	✓	5.3.2.2					9g	9000		
3	✓	5.3.2.7	4.2.1.b	Default, landing position	2 main att. points	Hip fixated, landing conf.	6g	6000	10	OK
4	✓						15g	15000		
5	✓	5.3.2.4	4.2.1.a rescue	Rescue	2 rescue att. Pnts.	Hip fixated	9g	9000	10	OK
6	✓						15g	15000		
7	✓	5.3.2.3	4.2.1.b rescue	Rescue, landing	ONE main att.	1 central hip fixation	6g	6000	10	OK
8	✓						3g	3000		
9		5.3.2.5	4.2.1.d	Towing	2 main att. + 2 tow att.	None	3g	3000	10	n/a
10	✓	5.3.2.6	4.2.1.c	Default, Negatif	One main att.	Head fix.	4.5g	4500	10	OK
11	✓	6g					6000	10		
12	✓	5.3.2.6	4.2.1.c rescue	Upside down rescue	2 rescue att. downw.	Head fix.	6g	6000	10	OK
							6g	6000		

### B. HARNESS PROTECTION SHOCK TEST

Most paraglider harnesses are equipped with a protection device that damps the shock on the pilot's spine during a hard landing.

Shock impact tests have to be executed on these harnesses in order to prove the damping characteristics of it.



Test ID	TESTED ?	Standar d Ref.:	TEST setup	Anchoring		Impact			Result		
		LTF		Attach- ment points	Dummy	Max. tolerated peak impact in g	Max Peak impact measured	Impact duration of + 38 g (if any) recorded:		Impact duration of + 20 g (if any) recorded:	
<b>PRO TECT 1</b>	✓	5.1.1	<b>Default flying position</b>	Test dummy is attached to the harness like a pilot in flight.			+50g	22.46	0	13.22	<b>OK</b>

### C. RESCUE DEPLOYMENT RESISTANCE TEST

The deployment of the rescue system has to be ensured in all circumstances of flight. This test is to verify whether the force needed to deploy is in between reasonable limits.

Test ID	TESTED ?	Standar d Ref.	TEST setup	Anchoring		Force for single hand deployment			Result	
		LTF		Attach- ment points	Dummy	Min. force [N]	max. force [N]	Resistance measured [daN]		
<b>Resc depl</b>	✓	6.1.5	<b>Default flying position</b>	Test responsible is attached to the harness like a pilot in flight. (no dummy required)			20 N	70 N	n/t	<b>OK</b>

### D. RESCUE DEPLOYMENT STRAP STRENGTH TEST

The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal use. During this test is verified, whether this connection fulfill the requirements.

Test ID	TESTED ?	Standard Ref.		TEST setup	Minimum force [N]	Min. Test durati on [s]	Breaking resistance measured	Result
		LTF	EN 12491					
<b>Resc strap</b>	✓	6.1.8	5.3.2	Connection strap in tensile testing machine	700N	10	n/t	<b>OK</b>





After careful examination as explained in above mentioned test reports (from page 2 to page 18), the undersigned persons declare that the harness:

**SUPAIR - VLD**  
**Evasion 2**  
**Medium**

Complied with:

- **European Standard EN 1651 September 1999**  
And / or (if tested)
- **European Standard EN 12491 March 2001**  
And / or (if tested)
- **2. DV LuftGerPV §1, Nr. 7 c**

Villeneuve, December 01, 2014

Place, Date

Alain Zoller

Test responsible



page 4 of 4





Annex: detailed test reports


**Harness Test** **Test ID 1**

**Item:** Evasion 2  
**Manufacturer:** SUPAIR - VLD  
**Test place & date:** Villeneuve December 01, 2014  
**Test responsible:** Alain Zoller  
**Temp. [°C] & Humidity:** 21,5° C; 45%rel  
**Maximum certified pilot weight [kg]:** 120 kg

**Standard:** EN 1651 & 2. DV LuftGerPV §1, Nr. 7 c  
**Test standard §:** 5.3.2.1 (EN) & 4.2.1 a (LTF DV)

**Test setup:** Default flying position  
**Anchoring: Attachment points:** Both main riser attachments (3, 4)  
**Dummy:** Default, hip fixed (7, 8)


**Required load in g :** 9g (EN: 6g)  
**Minimum load [N]:** 9000 N (EN: 6000 N)  
**Required test load in kg:** **1080 kg**  
**Min. duration [s]:** 10 s



**Results**

**Duration of maintained min. load [s]:** **11.2 s**  
**Any signs of structural failure after this test:** **No visible failure**  
**Test result:** **Passed**

**Graph:**

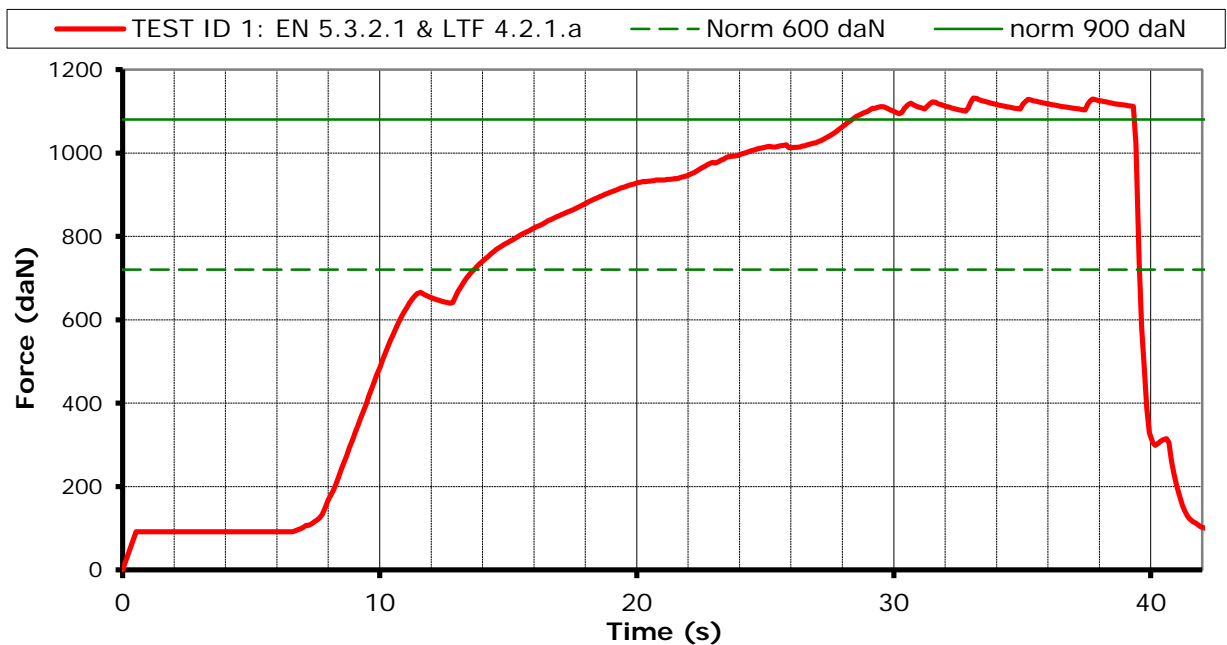

Air Turquoise SA certified by




**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID 1  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3



**Harness Test** **Test ID 2**


<b>Item:</b>	Evasion 2
<b>Manufacturer</b>	SUPAIR - VLD
<b>Test place &amp; date:</b>	Villeneuve December 01, 2014
<b>Test responsible:</b>	Alain Zoller
<b>Temp. [°C] &amp; Humidity:</b>	21,5° C; 45%rel
<b>Maximum certified pilot weight [kg]:</b>	120 kg
<b>Standard</b>	EN 1651
<b>Test standard §:</b>	5.3.2.2
<b>Test setup:</b>	Default flying position
<b>Anchoring: Attachment points:</b>	Both main riser attachments (3, 4)
<b>Dummy:</b>	Default, hip fixed (7, 8)
<b>Required load in g:</b>	15 g
<b>Min load [N]:</b>	15 000 N
<b>Required test load in kg:</b>	<b>1800 kg</b>
<b>Min. duration [s]:</b>	5s



**Results**

<b>Duration of maintained min. load [s]:</b>	<b>5.3 s</b>
<b>Any signs of structural failure after this test:</b>	<b>No visible failure</b>
<b>Test result:</b>	<b>Passed</b>

**Graph:**

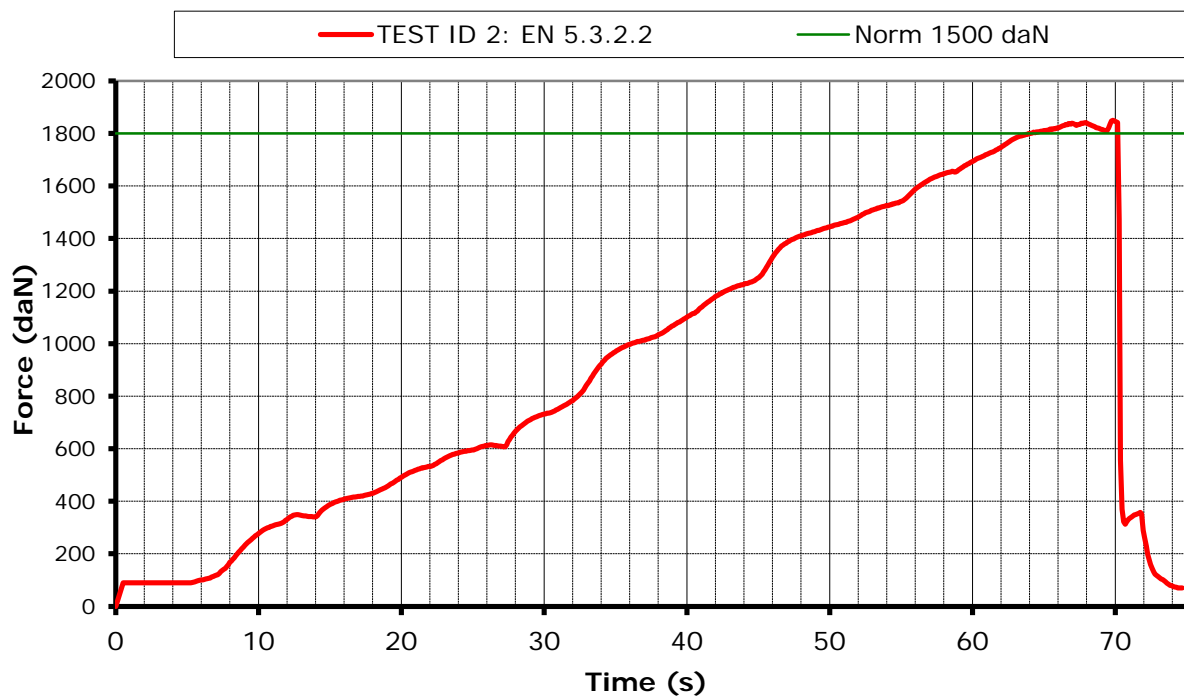

Air Turquoise SA certified by



**Air Turquoise S.A. - Certification of paraglider equipment**  
Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID 2  
Prepared by RE  
Rev.0, 25.01.2011  
No. 71.9.3



## Harness Test

## Test ID 3

Item: Evasion 2  
 Manufacturer: SUPAIR - VLD  
 Test place & date: Villeneuve December 01, 2014  
 Test responsible: Alain Zoller  
 Temp. [°C] & Humidity: 21,5° C; 45%rel  
 Maximum certified pilot weight [kg]: 120 kg

Standard: 2. DV LuftGerPV §1, Nr. 7 c

Test standard §: 4.2.1.b

Test setup: Flying position before landing: seat board (11) in landing position, leg straps (10) closed.

Anchoring: Attachment points: Both of the main riser attachments attached (3 and 4);


Dummy: Default, hip fixed (7, 8)

Required load in g: 6 g

Min load [N]: 6000 N

Required test load in kg: **720** kg

Min. duration [s]: 10 s




### Results

Duration of maintained min. load [s]: **11.6 s**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**

### Graph:

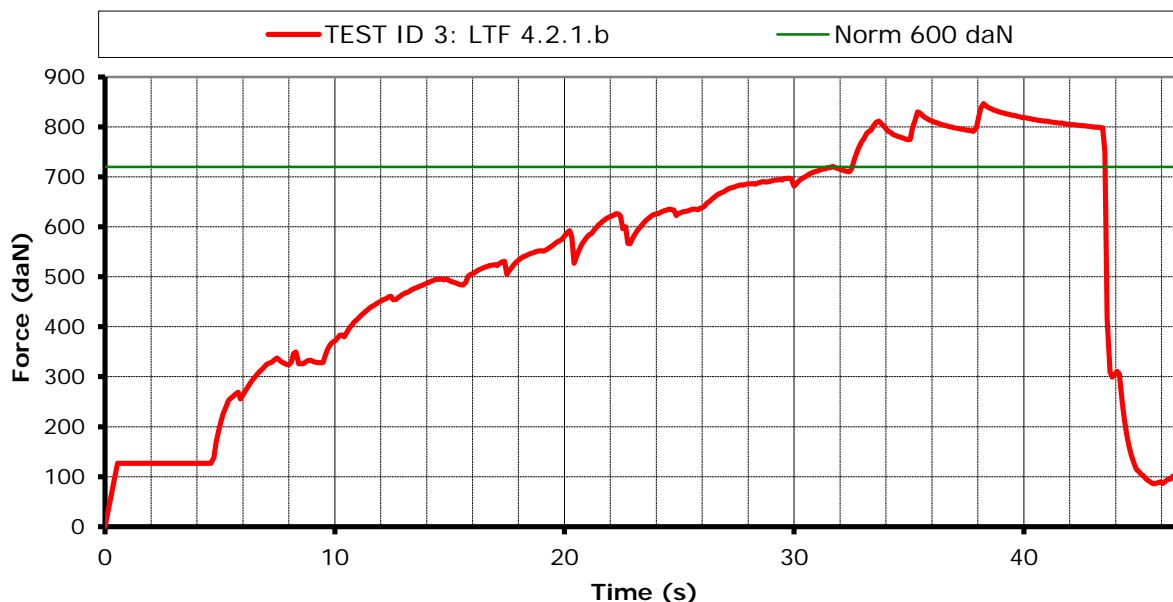

Air Turquoise SA certified by



**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID 3  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3





## Harness Test

## Test ID 4

Item: Evasion 2  
 Manufacturer: SUPAIR - VLD  
 Test place & date: Villeneuve December 01, 2014  
 Test responsible: Alain Zoller  
 Temp. [°C] & Humidity: 21,5° C; 45%rel  
 Maximum certified pilot weight [kg]: 120 kg

Standard: EN 1651

Test standard §: EN 5.3.2.7

Test setup: Flying position before landing: seat board (11) in landing position, leg straps (10) closed.

Anchoring: Attachment points: Both of the main riser attachments attached (3 and 4);


Dummy: Default, hip fixed (7, 8)

Required load in g: 15 g

Min load [N]: 15 000 N

Required test load in kg: **1800 kg**

Min. duration [s]: 5 s




### Results

Duration of maintained min. load [s]: **5.7 s**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**

### Graph:

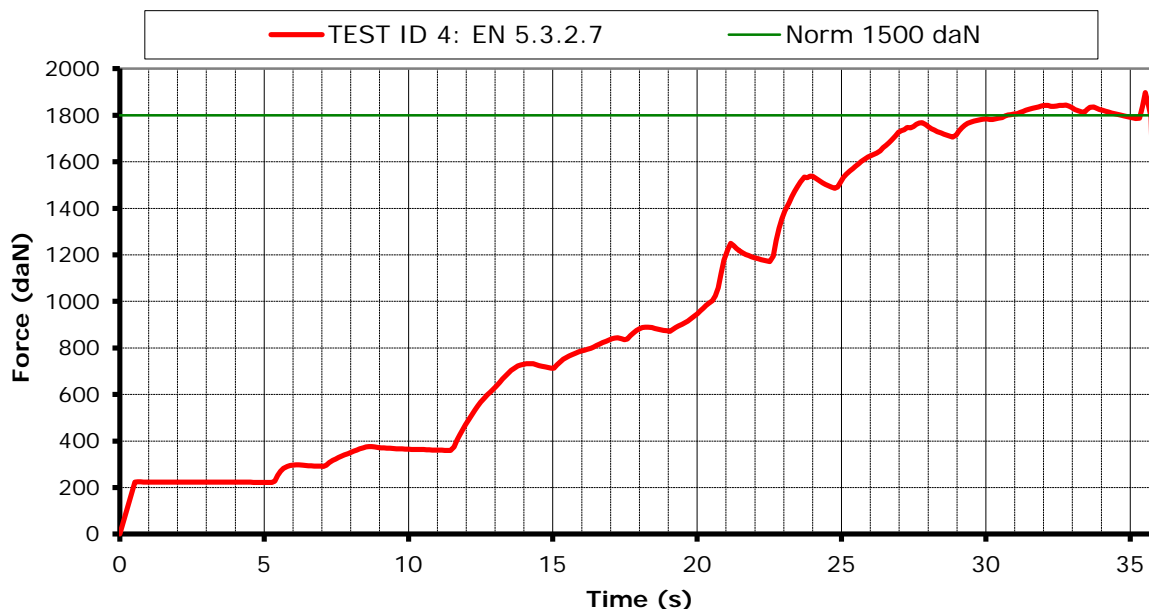

Air Turquoise SA certified by



Air Turquoise S.A. - Certification of paraglider equipment  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID 4  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3



## Harness Test

## Test ID 5

Item: Evasion 2  
 Manufacturer: SUPAIR - VLD  
 Test place & date: Villeneuve December 01, 2014  
 Test responsible: Alain Zoller  
 Temp. [°C] & Humidity: 21,5° C; 45%rel  
 Maximum certified pilot weight [kg]: 120 kg

Standard: 2. DV LuftGerPV §1, Nr. 7 c

Test standard §: 4.2.1.a rescue

Test setup: Rescue attachments

Anchoring: Attachment points: Rescue riser attachments (1,2)


Dummy: Hip fixed (7, 8)

Required load in g: 9 g

Min load [N]: 9 000 N

Required test load in kg: **1080 kg**

Min. duration [s]: 10 s




### Results

Duration of maintained min. load [s]: **10.7 s**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**

### Graph:

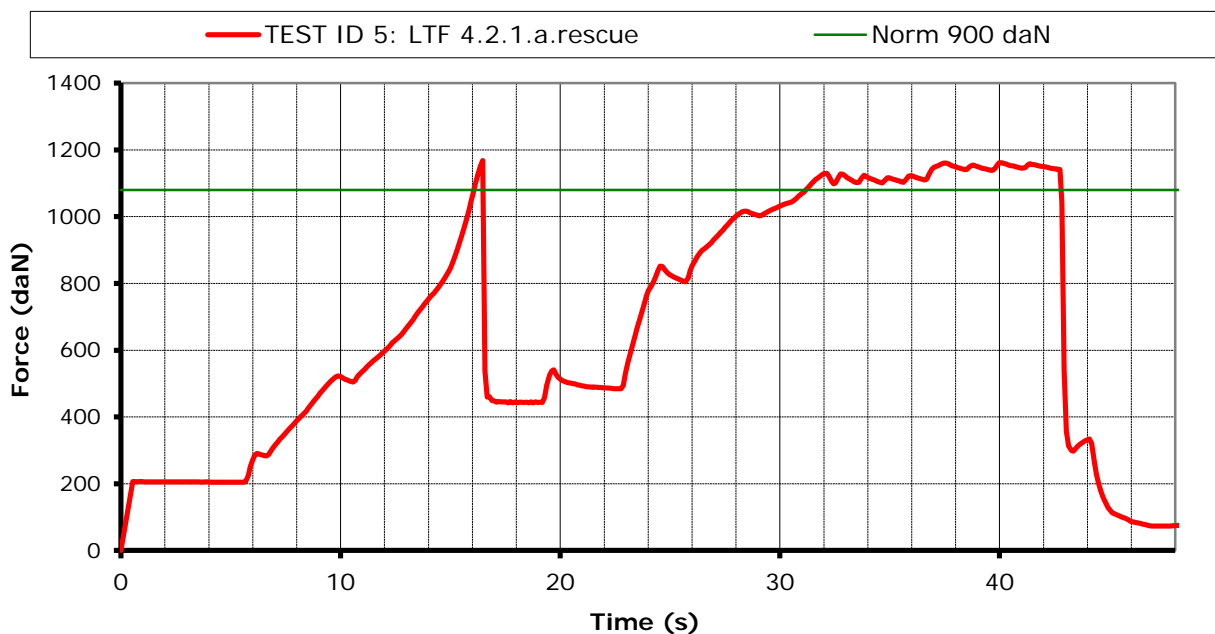

Air Turquoise SA certified by

ISO 9001  
BUREAU VERITAS  
Certification



Air Turquoise S.A. - Certification of paraglider equipment  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID 5  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3




**Harness Test**

**Test ID 6**

Item: Evasion 2  
 Manufacturer: SUPAIR - VLD  
 Test place & date: Villeneuve December 01, 2014  
 Test responsible: Alain Zoller  
 Temp. [°C] & Humidity: 21,5° C; 45%rel  
 Maximum certified pilot weight [kg]: 120 kg

Standard: EN 1651  
 Test standard §: 5.3.2.4  
 Test setup: Rescue attachments  
 Anchoring: Attachment points: Rescue riser attachments (1,2)  
 Dummy: Hip fixed (7, 8)  
 Required load in g: 15 g  
 Min load [N]: 15 000 N  
 Required test load in kg: **1800** kg  
 Min. duration [s]: 5 s




**Results**

Duration of maintained min. load [s]: **5.2 s**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**

**Graph:**

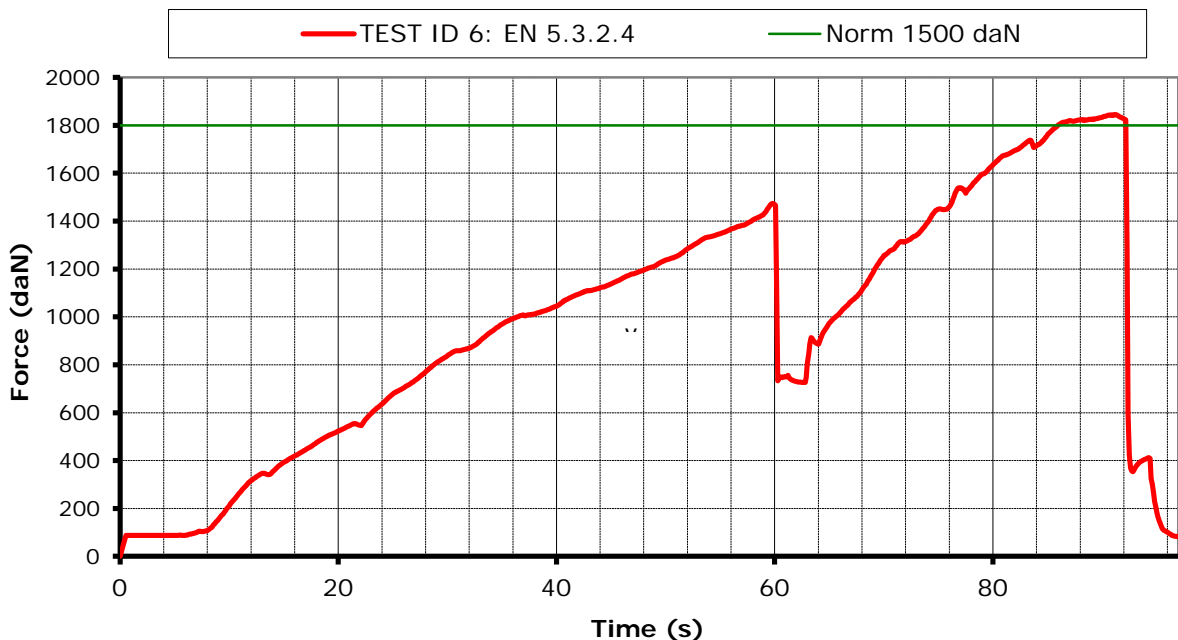

Air Turquoise SA certified by



**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID 6  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3



**Harness Test**

**Test ID 7**


**Item:** Evasion 2  
**Manufacturer:** SUPAIR - VLD  
**Test place & date:** Villeneuve December 01, 2014  
**Test responsible:** Alain Zoller  
**Temp. [°C] & Humidity:** 21,5° C; 45%rel  
**Maximum certified pilot weight [kg]:** 120 kg

**Standard:** 2. DV LuftGerPV §1, Nr. 7 c  
**Test standard §:** 4.2.1.b rescue

**Test setup:** Flying position before landing: seat board (11) in landing position, leg straps (10) closed.

**Anchoring: Attachment points:** Both of the rescue riser attachments attached (1 and 2);  
**Dummy:** Default, hip fixed (7, 8)


**Required load in g:** 6 g  
**Min load [N]:** 6 000 N  
**Required test load in kg:** 720 kg  
**Min. duration [s]:** 10 s

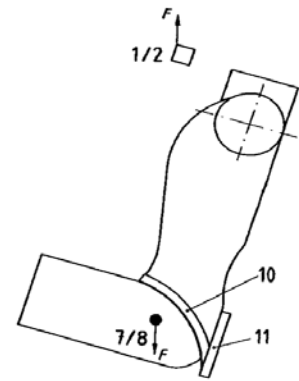

**Results**

**Duration of maintained min. load [s]:** 10.8 s  
**Any signs of structural failure after this test:** No visible failure  
**Test result:** Passed

**Graph:**

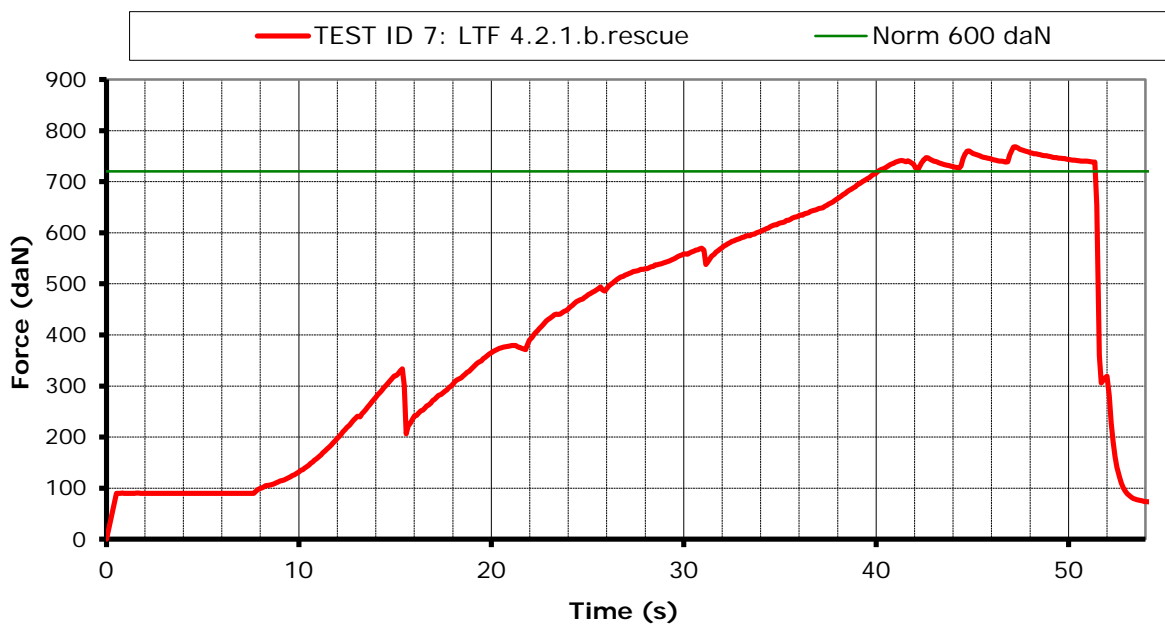

Air Turquoise SA certified by



**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c


Annex TEST ID 7  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3



**Harness Test** **Test ID 8**

Item: Evasion 2  
 Manufacturer: SUPAIR - VLD  
 Test place & date: Villeneuve December 01, 2014  
 Test responsible: Alain Zoller  
 Temp. [°C] & Humidity: 21,5° C; 45%rel  
 Maximum certified pilot weight [kg]: 120 kg


Standard: EN 1651  
 Test standard §: 5.3.2.3  
 Test setup: Only one riser attached  
 Anchoring: Attachment points: One main riser attachments (3)  
 Dummy: Hip fixed (7, 8 -> 12)  
 Required load in g: 6 g  
 Min load [N]: 6 000 N  
 Required test load in kg: **720 kg**  
 Min. duration [s]: 10 s



**Results**

Duration of maintained min. load [s]: **11.3 s**  
 Any signs of structural failure after this test: **No visible failure**  
 Test result: **Passed**

**Graph:**

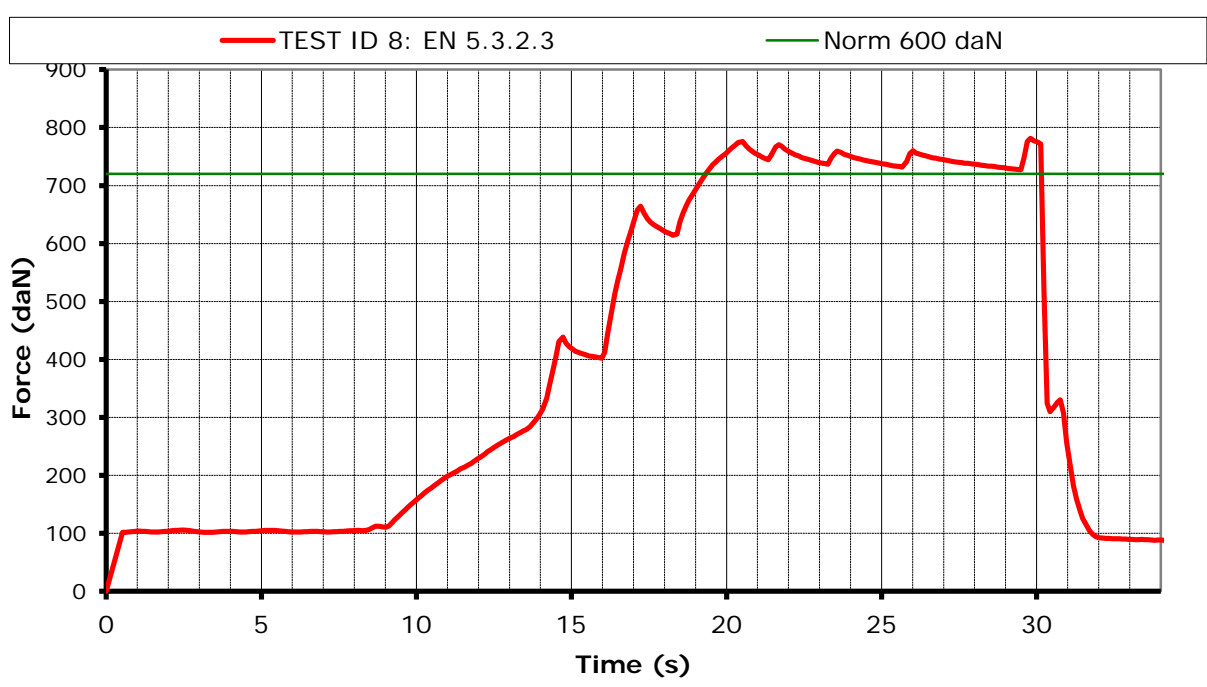

Air Turquoise SA certified by



**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID 8  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3






**Harness Test** **Test ID 10**

Item: Evasion 2  
 Manufacturer: SUPAIR - VLD  
 Test place & date: Villeneuve December 01, 2014  
 Test responsible: Alain Zoller  
 Temp. [°C] & Humidity: 21,5° C; 45%rel  
 Maximum certified pilot weight [kg]: 120 kg


Standard: EN 1651  
 Test standard §: 5.3.2.6  
 Test setup: Normal flying position in NEGATIF  
 Anchoring: Attachment points: ONE of the main riser attachments attached downwards(3 or 4);  
 Dummy: Dummy anchored at the head position (9)  
 Required load in g: 4.5 g  
 Min load [N]: 4500 N  
 Required test load in kg: **540 kg**  
 Min. duration [s]: 10 s

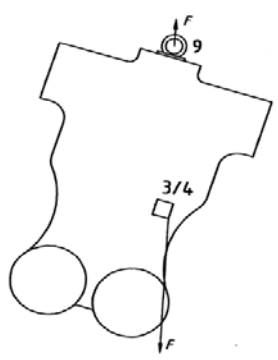

**Results**

Duration of maintained min. load [s]: **10.9 s**  
 Any signs of structural failure after this test: **No visible failure**  
 Test result: **Passed**

**Graph:**

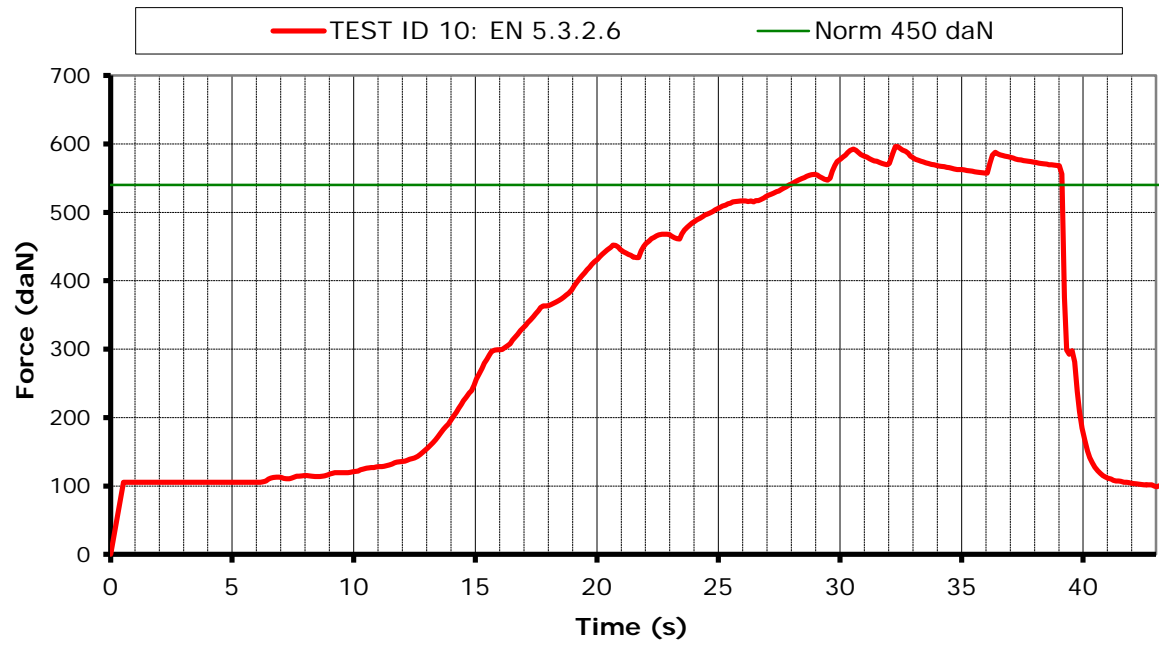

Air Turquoise SA certified by



**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID 10  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3



## Harness Test

## Test ID 11

Item: Evasion 2  
 Manufacturer: SUPAIR - VLD  
 Test place & date: Villeneuve December 01, 2014  
 Test responsible: Alain Zoller  
 Temp. [°C] & Humidity: 21,5° C; 45%rel  
 Maximum certified pilot weight [kg]: 120 kg


Standard: 2. DV LuftGerPV §1, Nr. 7 c

Test standard §: 4.2.1.c

Test setup: Pilot upside down flying position

Anchoring: Attachment points: Both of the main riser attachments attached downwards (3 and 4);  
 Dummy: Dummy anchored at the head position (9)

Required load in g: 6 g  
 Min load [N]: 6 000 N  
 Required test load in kg: **720 kg**  
 Min. duration [s]: 10 s

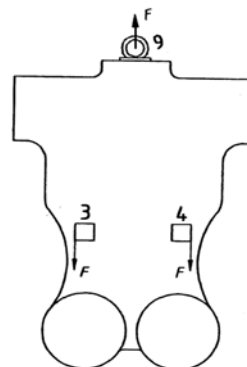


### Results

Duration of maintained min. load [s]: **12.1 s**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**

### Graph:

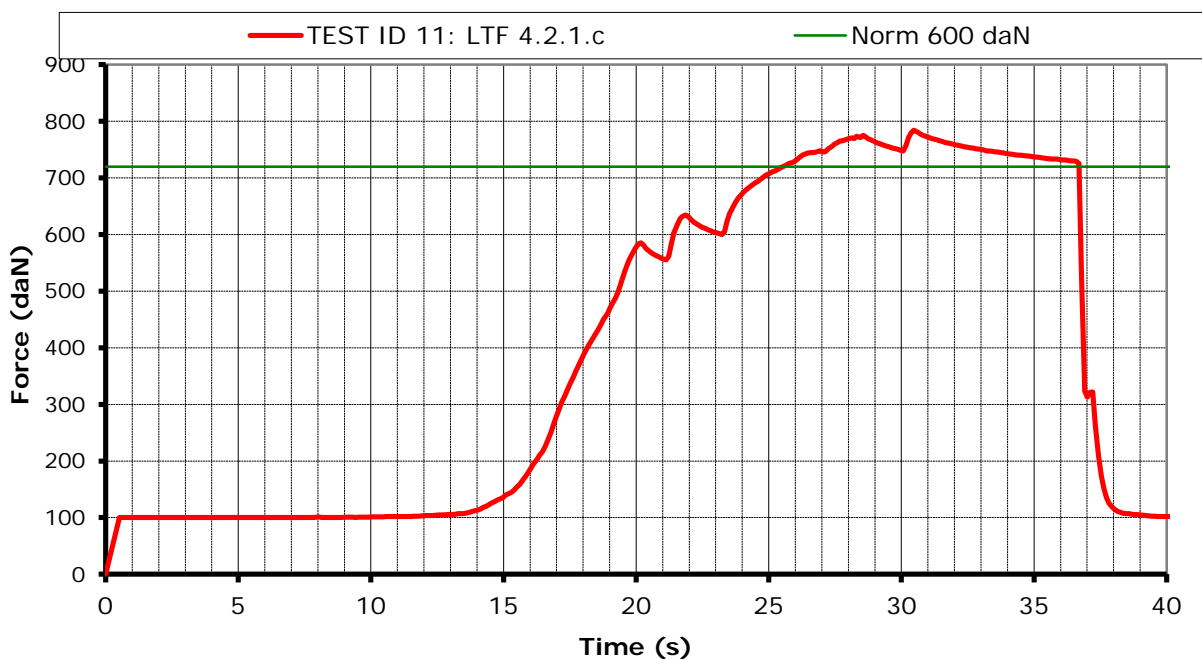

Air Turquoise SA certified by



Air Turquoise S.A. - Certification of paraglider equipment  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c


Annex TEST ID 11  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3



**Harness Test** **Test ID 12**

**Item:** Evasion 2  
**Manufacturer:** SUPAIR - VLD  
**Test place & date:** Villeneuve December 01, 2014  
**Test responsible:** Alain Zoller  
**Temp. [°C] & Humidity:** 21,5° C; 45%rel  
**Maximum certified pilot weight [kg]:** 120 kg


**Standard:** 2. DV LuftGerPV §1, Nr. 7 c  
**Test standard §:** 4.2.1.c rescue  
**Test setup:** Pilot upside down flying position  
**Anchoring: Attachment points:** Both of the rescue riser attachments attached downwards (1 and 2);  
**Dummy:** Dummy anchored at the head position (9)  
**Required load in g:** 6 g  
**Min load [N]:** 6 000 N  
**Required test load in kg:** **720 kg**  
**Min. duration [s]:** 10 s

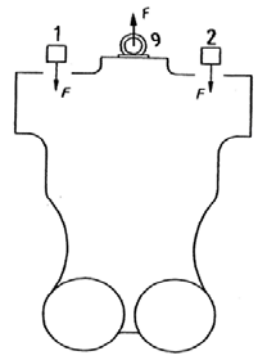

**Results**

**Duration of maintained min. load [s]:** **11.9 s**  
**Any signs of structural failure after this test:** **No visible failure**  
**Test result:** **Passed**

**Graph:**

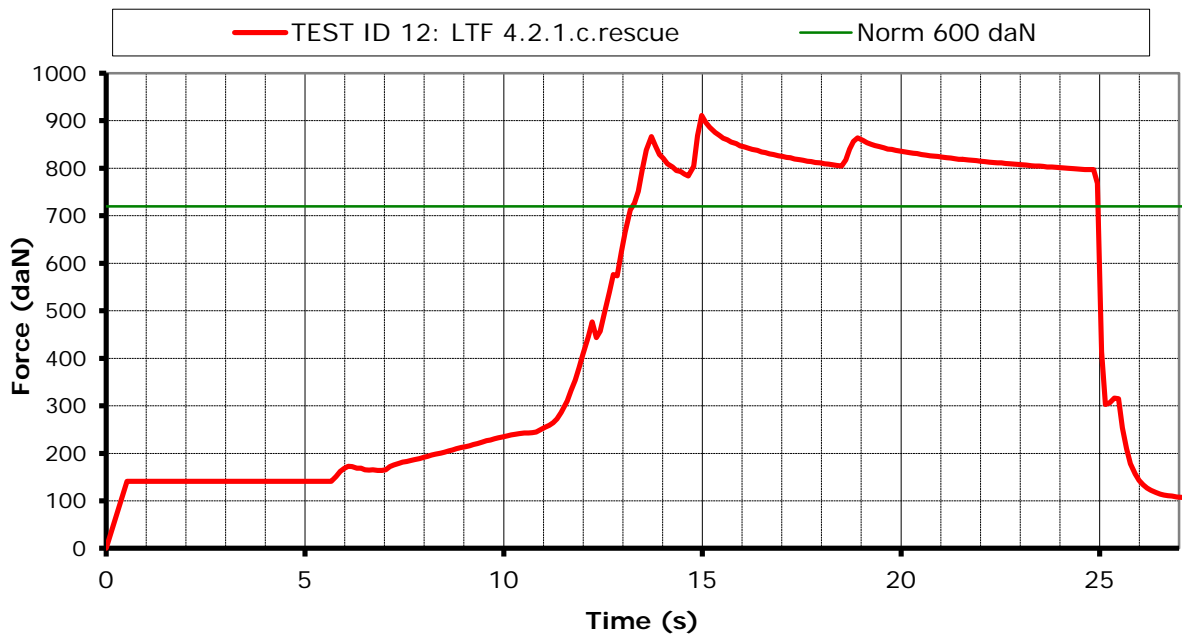

Air Turquoise SA certified by



**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID 12  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3



**Protector shock test** **Test ID Protect**

<b>Item:</b>	Evasion 2
<b>Manufacturer</b>	SUPAIR - VLD
<b>Test place &amp; date:</b>	Villeneuve December 01, 2014
<b>Test responsible:</b>	Alain Zoller
<b>Temp. [°C] &amp; Humidity:</b>	21,5° C; 45%rel
<b>Maximum certified pilot weight [kg]:</b>	120 kg

**Standard** 2. DV LuftGerPV §1, Nr. 7 c

**Test standard §:** 5.1.1

**Test setup:** Harness attached to protector test dummy, in a similar way like a real pilot in flight.  
Impact will be simulated by dropping the dummy from a certain height (with and without reserve).  
To simulate the "in-flight" conditions, the airbag is inflated with pressurized air equalling an airspeed of 7m/s. Inflation has to be stopped at least 5 sec before impact.  
Impact will be measured by an accelerometer mounted on the dummy. (Impact measured in g's)

**Requirements:**

- Minimum height:** 1.65 m (between lowest point test dummy and impact surface)
- Impact requirements:**
  - +50g as absolute maximum;
  - +38g during less than 7 msec;
  - +20g during less than 25 msec.
- Repetitions:** The test will be performed 2 times, minimum 1 hour and maximum 2 hours after the first impact (with airbag protectors this pause is not necessary). The 2 Max-values should not differ more than 20%

**Results**

Shock test 1:

Impact at a height of 1.65m:	22.46	} $\Delta < 20\% ?$
Impact duration of + 38 g (if any):	0	
Impact duration of +20 g (if any):	13.22	

Shock test 2:


Impact at a height of 1.65m:	22.99	} $\Delta < 20\% ?$
Impact duration of + 38 g (if any):	0	
Impact duration of +20 g (if any):	14.28	

**Test Result:** Passed






Graph 1:

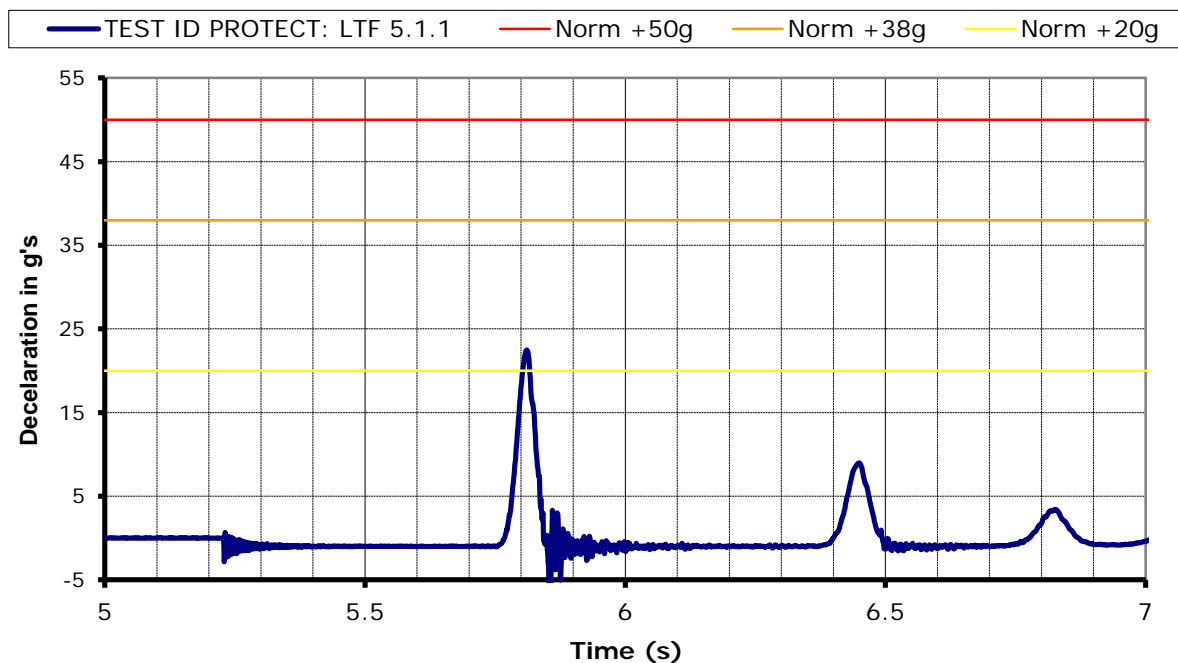

Graph 2:

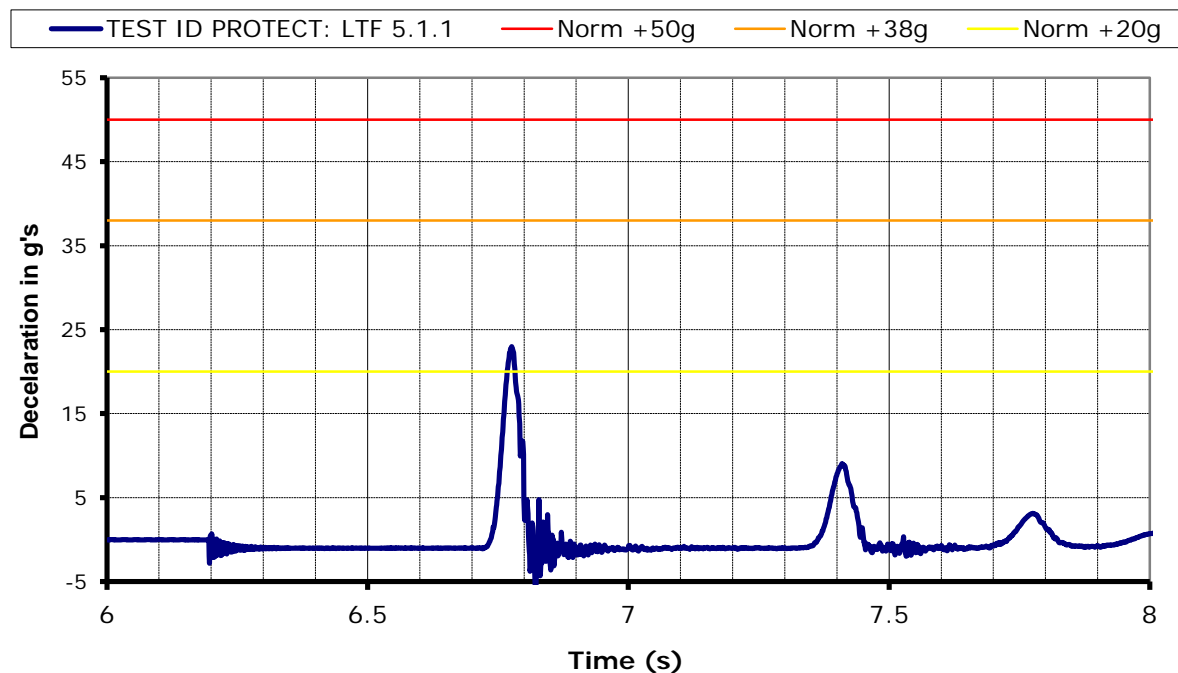

Air Turquoise SA certified by

ISO 9001  
 BUREAU VERITAS  
 Certification



**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID Protect 1  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3





Rescue deployment resistance test		Test ID resc
<b>Item:</b>	Evasion 2	
<b>Manufacturer</b>	SUPAIR - VLD	
<b>Test place &amp; date:</b>	Villeneuve	December 01, 2014
<b>Test responsible:</b>	Alain Zoller	
<b>Temp. [°C] &amp; Humidity:</b>	21,5° C; 45%rel	
<b>Maximum certified pilot weight [kg]:</b>	120	kg
<b>Standard</b>	2. DV LuftGerPV §1, Nr. 7 c	
<b>Test standard §:</b>	6.1.5	
<b>Test setup:</b>	<p>The deployment of the rescue system has to be ensured in all circumstances, especially with a damaged glider.</p> <p>The pilot has to be able to deploy the rescue chute with a single pull out of the outer container, single handed and in an anatomical favorable direction.</p> <p>In order to simulate this, the test responsible deploys the rescue seated in the harness. In a similar way as in real flight. The deployment resistance is approximately measured by the load cell, which is placed between the hand of the test responsible and the rescue hand grip.</p> <p>On the other hand inadvertent deployment has to be fairly remote. Therefore a shear link has to withstand a minimum load.</p>	
<b>Requirements:</b>	<p><b>Max force for single hand deployment:</b></p> <p><b>Min force to prevent unwanted opening:</b></p>	<p>approx. 70 N</p> <p>approx. 20 N</p>
<b>Results</b>		
<b>Measured peak to peak required force for deployment [daN]:</b>	4.8 daN	
<b>Comment:</b>	Passed	
<b>Graph:</b>		

Air Turquoise SA certified by



**Air Turquoise S.A. - Certification of paraglider equipment**  
 Tested in accordance with EN 1651:1999 and 2.DV LuftGerPV§1, Nr.7c

Annex TEST ID resc depl  
 Prepared by RE  
 Rev.0, 25.01.2011  
 No. 71.9.3



## Rescue deployment strap strength test

## Test ID resc strap

Item: Evasion 2  
 Manufacturer: SUPAIR - VLD  
 Test place & date: Villeneuve December 01, 2014  
 Test responsible: Alain Zoller  
 Temp. [°C] & Humidity: 21,5° C; 45%rel  
 Maximum certified pilot weight [kg]: 120 kg

Standard: EN 12491 & 2. DV LuftGerPV §1, Nr. 7 c

Test standard §: 5.3.2 (EN 12491) & 6.1.8 (LTF)

Test setup: The handgrip of the outer container has to be connected to the inner container with a removable loop in a way that it is possible to use the inner container with different types of outer containers.  
 The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal operation.  
 In order to verify this, the connection is tested on its tensile strength by a default tensile testing setup.  
 In addition to this the breaking resistance will also be measured.

Requirements: Min. tensile strenght for 10 s: 700 N (= 70daN)

### Results

Duration of maintained load [s]: **< 10 sec**

Breaking resistance [daN]: **162 daN**

Comment: **Passed**

### Graph:

